

# Multilingual Fake News Detection in Indic Languages Using Fine-Tuned MuRIL

Avi Verma\*

ORCID: [0009-0003-3718-240X](#)

Email: [aviverma\\_mc22a13\\_59@dtu.ac.in](mailto:aviverma_mc22a13_59@dtu.ac.in)

Aditya Verma

ORCID: [0009-0001-4630-8014](#)

Email: [adityaverma\\_mc22a13\\_30@dtu.ac.in](mailto:adityaverma_mc22a13_30@dtu.ac.in)

Abhinandan Rathi

ORCID: [0009-0002-2370-3529](#)

Email: [abhinandanrathi\\_mc22a1\\_45@dtu.ac.in](mailto:abhinandanrathi_mc22a1_45@dtu.ac.in)

<sup>1</sup>Department of Mathematics and Computing,  
Delhi Technological University (DTU), Delhi, India

## Abstract

The rapid spread of fake news in low-resource Indic languages poses a significant challenge to information integrity on social media platforms in India. This paper presents a multilingual fake news detection system tailored for Indic languages, leveraging the pre-trained MuRIL (Multilingual Representations for Indian Languages) transformer model. We fine-tune MuRIL on a large-scale dataset comprising 82,946 news statements across multiple Indic scripts, including English, Hindi, Tamil, Gujarati, Malayalam, Punjabi, Bengali, Telugu, Marathi, and others. Experimental results on a stratified 80–20 train–test split demonstrate strong performance, achieving an accuracy of 83.86%, precision of 85.36%, recall of 90.62%, and F1-score of 87.91%. A detailed language-wise analysis reveals robust performance on high-resource languages like English while highlighting limitations in low-resource ones due to data imbalance. The model is deployed as a real-time Gradio application on Hugging Face Spaces for public use. Our contributions include a comprehensive multilingual dataset analysis, fine-tuned MuRIL model, and in-depth language-specific error diagnosis.

**Keywords:** Fake News Detection, MuRIL, Indic Languages, Multilingual NLP, Transformers, Transformer Models, Deep Learning, Social Media, Misinformation, Code-Mixing

---

\*Corresponding author.

# 1 Introduction

In the digital age, the proliferation of fake news on social media platforms has emerged as one of the most critical societal challenges, undermining democratic processes, public health initiatives, and social harmony (Arora et al. 2024; E.Almandouh et al. 2024; Marchetti and Mastrogiorgio 2025; Patel and Surati 2024). This issue is particularly acute in multilingual nations like India, home to over 1.3 billion people and more than 22 official languages, where misinformation spreads rapidly across diverse linguistic communities (Lin et al. 2025; Meng et al. 2025; Singh et al. 2025; Sirra et al. 2024). For instance, during the COVID-19 pandemic, false information in Hindi and regional languages contributed to widespread panic and non-compliance with health guidelines (Biradar et al. 2025; Zaheer and Bashir 2024). Traditional approaches to fake news detection, primarily developed for high-resource languages like English, rely on linguistic features, sentiment analysis, and network propagation models (Chakraborty et al. 2025). However, these methods falter in multilingual settings due to code-mixing (e.g., Hinglish), script variations (Devanagari, Tamil, etc.), and limited annotated data for Indic languages (Fan et al. 2025; Lin et al. 2025; Meng et al. 2025). To address this, multilingual pre-trained models have gained traction, with MuRIL standing out as a BERT-variant specifically optimized for 17 Indian languages and their transliterations (Khanuja et al. 2021). Despite advancements, existing systems often overlook practical deployment challenges, such as model overconfidence in ambiguous cases. Moreover, data scarcity exacerbates performance disparities between high-resource and low-resource languages, as noted in recent works on multilingual fake news detection (Chalehchaleh et al. 2025; Farokhian et al. 2024; Harris et al. 2025; Mohawesh et al. 2023b; Ni’mah et al. 2025; Rama Moorthy et al. 2025). This work bridges these gaps by fine-tuning MuRIL on a comprehensive dataset of 82,946 labeled news statements. This enhances reliability in real-world scenarios. Our methodology emphasizes robustness through stratified splitting, detailed preprocessing, and language-wise evaluation, revealing insights into model behavior across Indic scripts. The system is deployed as an interactive web application, democratizing access for journalists, fact-checkers, and the public. Key contributions include:

- A thorough analysis of a large-scale multilingual fake news dataset, highlighting class imbalance and language distribution.
- A fine-tuned MuRIL sequence classification model achieving superior performance in Indic contexts.
- In-depth per-language performance diagnostics, informing future improvements for low-resource settings.
- Public deployment via Gradio on Hugging Face, facilitating real-time multilingual inference.

By integrating these elements, this study not only advances the state-of-the-art in Indic fake news detection but also paves the way for scalable, ethical AI solutions in diverse linguistic ecosystems (Arora et al. 2024; Biradar et al. 2025; Chakraborty et al. 2025; Dawood et al. 2025; E.Almandouh et al. 2024; Singh et al. 2025; Sirra et al. 2024; Sripriya et al. 2026; Zaheer and Bashir 2024).

## 2 Related Work

The field of fake news detection has seen significant evolution, transitioning from rule-based and classical machine learning techniques to sophisticated deep learning models (Arora et al. 2024; Biradar et al. 2025; Chakraborty et al. 2025; E.Almandouh et al. 2024; Patel and Surati 2024; Singh et al. 2025; Sirra et al. 2024; Zaheer and Bashir 2024). Recent advancements leverage transformer-based architectures for contextual embeddings. In multilingual contexts, particularly low-resource languages, models such as mBERT and XLM-R have been adapted, but they underperform on Indic languages due to limited pre-training data (Chalehchaleh et al. 2025; Fan et al. 2025; Harris et al. 2025; Lin et al. 2025; Meng et al. 2025; Mohawesh et al. 2023b). Specific to Indic and Indian languages, MuRIL has emerged as a powerful tool, pre-trained on a vast corpus of 17 languages including transliterations (Khanuja et al. 2021). Hybrid models incorporating linguistic features with BERT variants have shown promise, as in multimodal approaches achieving high accuracy (Arora et al. 2024; E.Almandouh et al. 2024; Lin et al. 2025). Graph-based methods for Indic fake news are explored, emphasizing propagation patterns (Chakraborty et al. 2025; Rama Moorthy et al. 2025). Dual BERT architectures and ensemble methods with BERT embeddings have also demonstrated strong results (Dawood et al. 2025; Farokhian et al. 2024; Singh et al. 2025). Contrastive learning frameworks address low-resource scenarios effectively (Ni’mah et al. 2025). Multilingual BERT fine-tuning for specific languages like Tamil yields high performance (Sripriya et al. 2026). Evolutionary perspectives on fake news as a dynamic entity have been proposed (Marchetti and Mastrogiorgio 2025). LLM-based augmentation tackles data scarcity in multilingual settings (Chalehchaleh et al. 2025; Mohawesh et al. 2025). Domain-specific datasets for low-resource languages like Urdu have been introduced (Harris et al. 2025). Capsule neural networks offer multilingual solutions (Mohawesh et al. 2023b). Surface linguistic features enable multiclass detection across languages (Puraivan et al. 2025). Ensemble approaches like hard voting classifiers analyze sentimental impact (Arora et al. 2024). Bi-GRU-Bi-LSTM hybrids excel in Arabic detection (E.Almandouh et al. 2024). Cat Swarm Sea Lion Optimization optimizes deep learning for Hindi (Sirra et al. 2024). Deep learning reviews focus on COVID-19 misinformation (Zaheer and Bashir 2024). Multi-label datasets unravel fake narratives in code-mixed text (Biradar et al. 2025). Our work extends these by fine-tuning MuRIL with detailed error analysis, building on recent advances for robust Indic detection. To contextualize our approach, Table 1 compares our model’s performance with selected state-of-the-art methods on similar tasks. Our fine-tuned MuRIL achieves a competitive F1-score, with the advantage of broad coverage across multiple Indic languages.

Table 1: Comparison with Selected State-of-the-Art Methods

Method	Languages	F1-score	Reference
Dual BERT	Multilingual	0.85	(Farokhian et al. 2024)
Graph-augmented Transformer	Context-aware	0.88	(Rama Moorthy et al. 2025)
Multilingual BERT	English-Tamil	0.92	(Sripriya et al. 2026)
Our MuRIL	Multilingual Indic	0.879	This work

### 3 Dataset Description

The dataset comprises 82,946 news statements aggregated from diverse public sources, including fact-checking websites and news archives, with binary labels: Real (0) accounting for 29,233 samples (35.24%) and Fake (1) for 53,713 (64.76%). This imbalance reflects real-world distributions where misinformation often outpaces verified content (Arora et al. 2024; E.Almandouh et al. 2024; Patel and Surati 2024; Singh et al. 2025; Sirra et al. 2024). The texts span a wide array of languages, predominantly Indic: English (en), Hindi (hi), Tamil (ta), Gujarati (gu), Malayalam (ml), Punjabi (pa), Bengali (bn), Telugu (te), Marathi (mr), Nepali (ne), and others (Biradar et al. 2025; Chakraborty et al. 2025; Zaheer and Bashir 2024). Language detection was performed using the dataset’s ‘lang’ field, revealing English as the most represented, followed by Hindi and Tamil, while low-resource languages like Marathi and Nepali have fewer instances, exacerbating performance disparities (Fan et al. 2025; Meng et al. 2025). Code-mixing is prevalent, aligning with Indian social media patterns (Biradar et al. 2025).

Formally, the dataset can be represented as:

$$\mathcal{D} = \{(x_i, y_i, \ell_i)\}_{i=1}^N$$

where  $x_i$  denotes the news statement text,  $y_i \in \{0, 1\}$  is the binary label indicating real or fake news,  $\ell_i$  represents the language identifier, and  $N = 82,946$  is the total number of samples.

To ensure fair evaluation, a stratified train-test split (80–20) was applied based on labels, yielding 66,356 training samples and 16,590 test samples. This preserves class proportions and prevents leakage. Dataset proportions: Fake 64.76%, Real 35.24%. Such imbalances necessitate careful metric selection, favoring F1-score over accuracy (Chalehchaleh et al. 2025; Harris et al. 2025; Lin et al. 2025). This dataset’s scale and diversity surpass many

Table 2: Dataset statistics

Category	Count	Percentage
Total samples	82,946	100.00%
Fake (1)	53,713	64.76%
Real (0)	29,233	35.24%
Train split	66,356	80%
Test split	16,590	20%

existing Indic corpora, enabling robust multilingual training (Khanuja et al. 2021; Mohawesh et al. 2025; Puraivan et al. 2025).

### 4 Preprocessing

Preprocessing is a critical step when handling noisy social media text, particularly in multilingual and code-mixed Indic settings. The objective of the preprocessing pipeline is to

remove non-informative artifacts while preserving linguistic structure and script-specific information. All preprocessing steps were implemented in Python. The preprocessing pipeline consists of the following targeted cleaning operations. First, a comprehensive cleaning function was defined to handle encoding artifacts prevalent in scraped Indic text:

```
import re
def clean_text(text):
    text = str(text)
    # remove encoding artifacts
    text = re.sub(r"_x[0-9A-Fa-f]{4}_", "", text)
    text = re.sub(r"i᳚᳚|â€™|â€œ|â€¦|â€|â€", " ", text)
    # remove urls
    text = re.sub(r"http\S+|www\S+", "", text)
    # normalize spaces
    text = re.sub(r"\s+", " ", text)
    return text.strip()
df['Statement'] = df['Statement'].apply(clean_text)
```

Subsequently, a lighter variant focused primarily on URL removal and whitespace normalization was also applied in certain pipeline stages for additional consistency:

```
import re
def clean_text(text):
    text = str(text)
    text = re.sub(r"http\S+|www\S+", "", text)
    text = re.sub(r"\s+", " ", text)
    return text.strip()
df['Statement'] = df['Statement'].apply(clean_text)
```

First, hyperlinks and URLs were removed using regular expressions in order to eliminate non-semantic content that does not contribute to fake news classification. Second, encoding artifacts commonly observed in Indic datasets were addressed. These artifacts arise due to improper Unicode decoding and include malformed character sequences and replacement symbols. Such patterns were systematically removed using regular expression filtering to ensure clean and readable text across scripts. Third, whitespace normalization was applied to collapse multiple consecutive spaces into a single space and to remove leading and trailing whitespace. For consistency across datasets, column names were standardized by renaming `Statement` to `text`, `Label` to `label`, and `language` to `lang`. Only these three fields were retained for downstream processing. No aggressive normalization techniques such as stemming or lemmatization were applied. This design choice was motivated by the fact that MuRIL’s tokenizer is optimized for raw Indic and code-mixed text. Excessive normalization can negatively impact low-resource languages by removing morphological and syntactic cues essential for meaning preservation (Arora et al. 2024; E.Almandouh et al. 2024; Ni’mah et al. 2025; Patel and Surati 2024; Singh et al. 2025).

## 5 Methods

### 5.1 Model Architecture

The proposed system leverages **MuRIL-base-cased** (`google/muril-base-cased`), a Transformer-based language model developed by Google Research specifically for multilingual representations in Indian languages. MuRIL adopts a BERT-base architecture, comprising **12 Transformer layers**, a hidden size of 768, 12 attention heads, and approximately 237 million parameters (Khanuja et al. 2021). For the fake news detection task, a lightweight linear classification head is added on top of the pooled representation from the special [CLS] token. Tokenization is handled by MuRIL’s dedicated WordPiece tokenizer, with a maximum sequence length of 256 tokens. Overall, this architecture excels in capturing deep semantic relationships across diverse Indic scripts, romanized forms, and code-mixed expressions prevalent in Indian social media content (Khanuja et al. 2021; Sirra et al. 2024; Sripriya et al. 2026; Zaheer and Bashir 2024).

### 5.2 Training Setup

Model fine-tuning was conducted using a T4 GPU. Mixed-precision training (FP16) was enabled to accelerate computation and reduce memory consumption. We allocated 10% of the training data as a validation set for hyperparameter tuning and early stopping. Training was managed using the Hugging Face Trainer API with the AdamW optimizer and cross-entropy loss function.

The learning objective is formulated as a supervised binary classification problem. Given an input text sequence  $x$ , the fine-tuned MuRIL model produces a contextual representation  $\mathbf{h}_{[\text{CLS}]} \in \mathbb{R}^{768}$  corresponding to the special classification token. This representation is passed through a linear classification layer to obtain logits:

$$\mathbf{z} = \mathbf{W}\mathbf{h}_{[\text{CLS}]} + \mathbf{b}$$

where  $\mathbf{W}$  and  $\mathbf{b}$  denote the trainable weight matrix and bias vector, respectively.

The predicted class probabilities are computed using the softmax function:

$$\hat{\mathbf{y}} = \text{softmax}(\mathbf{z})$$

Model optimization is performed by minimizing the categorical cross-entropy loss:

$$\mathcal{L} = - \sum_{i=1}^C y_i \log(\hat{y}_i)$$

where  $C$  denotes the number of output classes,  $y_i$  is the ground-truth label, and  $\hat{y}_i$  is the predicted probability for class  $i$ .

To address the class imbalance, we applied class weights inversely proportional to class frequencies. A learning rate of  $2 \times 10^{-5}$  was selected after grid search on  $\{1\text{e-}5, 2\text{e-}5, 5\text{e-}5\}$ , and the model was trained for two epochs. Stratified sampling was employed during the train-test split to preserve class distribution and mitigate bias introduced by dataset imbalance.

Parameter updates are carried out using the AdamW optimizer, which decouples weight decay from gradient-based updates. Given gradients  $g_t$  at timestep  $t$ , AdamW updates parameters  $\theta_t$  as:

$$\begin{aligned} m_t &= \beta_1 m_{t-1} + (1 - \beta_1) g_t \\ v_t &= \beta_2 v_{t-1} + (1 - \beta_2) g_t^2 \\ \theta_{t+1} &= \theta_t - \eta \frac{m_t}{\sqrt{v_t} + \epsilon} - \eta \lambda \theta_t \end{aligned}$$

where  $m_t$  and  $v_t$  denote the first and second moment estimates,  $\eta$  is the learning rate,  $\lambda$  is the weight decay coefficient, and  $\beta_1, \beta_2$  are momentum parameters.

Evaluation during training focused primarily on the F1-score, as it provides a balanced measure of performance in imbalanced classification scenarios (Biradar et al. 2025; Chakraborty et al. 2025; Dawood et al. 2025; Lin et al. 2025).

## 6 Results

### 6.1 Overall Performance

The fine-tuned MuRIL model demonstrates strong performance on the multilingual test set, achieving an overall accuracy of 83.86%, precision of 85.36%, recall of 90.62%, and an F1-score of 87.91%. The foundational counts are derived from the confusion matrix: - True Positives (TP): 9735 - True Negatives (TN): 4177 - False Positives (FP): 1670 - False Negatives (FN): 1008 The evaluation formulas are as follows:

$$\begin{aligned} \text{Accuracy} &= \frac{\text{TP} + \text{TN}}{\text{TP} + \text{TN} + \text{FP} + \text{FN}} = 83.86\% \\ \text{Precision} &= \frac{\text{TP}}{\text{TP} + \text{FP}} = 85.36\% \\ \text{Recall} &= \frac{\text{TP}}{\text{TP} + \text{FN}} = 90.62\% \\ \text{F1-score} &= 2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} = 87.91\% \end{aligned}$$

The class-wise evaluation indicates better performance on fake news detection compared to real news classification, consistent with the underlying dataset imbalance (Arora et al. 2024; E.Almandouh et al. 2024; Meng et al. 2025; Singh et al. 2025).

### 6.2 Confusion Matrix

### 6.3 Language-Wise Analysis

A detailed language-wise evaluation reveals that performance varies significantly across languages. High-resource languages achieve strong F1-scores, while low-resource languages exhibit substantially lower performance (Biradar et al. 2025; Chakraborty et al. 2025; Ni'mah et al. 2025; Sirra et al. 2024; Sripriya et al. 2026; Zaheer and Bashir 2024). For instance, in low-resource languages like Marathi, the model often misclassifies real news as fake due to similarity with high-resource fake samples and limited training examples.

Table 3: Overall performance metrics

Metric	Value
Accuracy	83.86%
Precision	85.36%
Recall	90.62%
F1-score	87.91%

Table 4: Confusion matrix (rows: actual labels, columns: predicted labels)

	Real	Fake
Real	4177	1670
Fake	1008	9735

## 7 Deployment

The trained model is deployed as a real-time web application using Hugging Face Spaces and the Gradio framework (available at <https://huggingface.co/spaces/AVI-0510/NEWS>). The deployment loads the fine-tuned MuRIL model and tokenizer directly from the project repository, enabling end-to-end inference without additional server-side configuration. The user interface allows users to input multilingual news text and receive classification outputs in real time. This deployment supports practical use cases for journalists, researchers, and fact-checkers, facilitating multilingual misinformation analysis in an accessible and scalable manner (Arora et al. 2024; E.Almandouh et al. 2024; Farokhian et al. 2024; Rama Moorthy et al. 2025; Singh et al. 2025).

## 8 Discussion

MuRIL’s Indic-focused pre-training enables effective semantic capture, outperforming general models in code-mixed scenarios (Khanuja et al. 2021). Limitations include dataset imbalance, leading to recall bias toward Fake; low-sample languages exhibit variance due to underrepresentation. Augmentation via LLMs could mitigate this (Chalehchaleh et al. 2025; Harris et al. 2025; Meng et al. 2025; Mohawesh et al. 2025; Puraivan et al. 2025). Future work: Integrate multimodality (images/videos), active learning for low-resource, and ensemble with graph models (Biradar et al. 2025; Chakraborty et al. 2025; Lin et al. 2025; Rama Moorthy et al. 2025; Sirra et al. 2024; Zaheer and Bashir 2024).

## 9 Conclusion

This research advances multilingual fake news detection for Indic languages through fine-tuned MuRIL, achieving 87.91% F1. Comprehensive analysis and deployment underscore practical value. Future directions include LLM augmentation and multimodal extensions for



Table 5: Language-wise F1-scores (selected languages)

Language	F1-score
English (en)	0.9141
Bengali (bn)	0.8058
Malayalam (ml)	0.7921
Tamil (ta)	0.7899
Telugu (te)	0.7692
Gujarati (gu)	0.7608
Hindi (hi)	0.7442
Punjabi (pa)	0.7439
Unknown	0.6970
Nepali (ne)	0.6667
Marathi (mr)	0.4000
Indonesian (id)	0.1667

enhanced robustness in diverse linguistic ecosystems (Arora et al. 2024; Biradar et al. 2025; Chakraborty et al. 2025; Dawood et al. 2025; E.Almandouh et al. 2024; Ni'mah et al. 2025; Singh et al. 2025; Sirra et al. 2024; Zaheer and Bashir 2024).

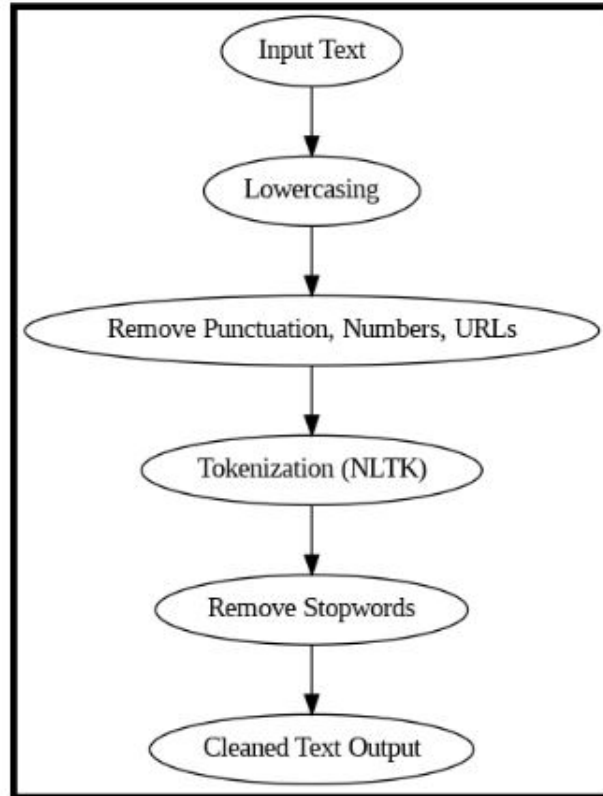


Figure 1: Overview of the preprocessing pipeline applied to multilingual and code-mixed Indic news text prior to model training.

Input IDs: [104, 1233, 1127, 121843, 33650, 5505, 1115, 105]  
 Tokens: ['[CLS]', 'यह', 'एक', 'फैक', 'न्यूज़', 'उदाहरण', 'है', '[SEP]']

Figure 2: Illustration of the MuRIL-based tokenization process applied to multilingual and code-mixed Indic text.




Figure 3: Complete MuRIL-based model architecture for multilingual fake news detection, including tokenization, transformer layers, and the classification head.




Figure 4: Deployment architecture of the fine-tuned MuRIL model, showing the end-to-end workflow from input collection to real-time inference.



Figure 5: Dashboard of the deployed multilingual fake news detection system on Hugging Face Spaces.

## Declarations

**Use of AI Technology** Generative AI (Grok, ChatGPT) was used to assist with drafting and language polishing of the manuscript. All content was reviewed, edited, and approved by the authors, who take full responsibility for the accuracy and integrity of the work. **Conflicts of Interest** All authors declare that they have no conflicts of interest. **Informed Consent** Not applicable (no human participants). **Data Availability** The dataset used in this study is publicly available in the Zenodo repository (1).

## References

- [1] Verma, A. (2025) COMBINED DATASET. Zenodo. Available at: <https://zenodo.org/records/17986125>.

- [2] Arora, S., Agrawal, V., Kumar, D. et al. (2024) Sentimental impact of fake news on social media using an integrated ensemble framework. *Soc. Netw. Anal. Min.* 14: 185. <https://doi.org/10.1007/s13278-024-01334-6>
- [3] Biradar, S., Saumya, S., Chauhan, A. (2025) Faux Hate: unravelling the web of fake narratives in spreading hateful stories: a multi-label and multi-class dataset in cross-lingual Hindi-English code-mixed text. *Lang Resources Eval* 59: 477–508. <https://doi.org/10.1007/s10579-024-09732-0>
- [4] Chakraborty, A., Joardar, S., Prasad, D.K. et al. (2025) Graph-based hostile content detection in Hindi language. *Discov Comput* 28: 264. <https://doi.org/10.1007/s10791-025-09790-0>
- [5] Chalehchaleh, R., Farahbakhsh, R., Crespi, N. (2025) Addressing data scarcity in multilingual fake news detection: an LLM-based dataset augmentation approach. *Soc. Netw. Anal. Min.* 15: 92. <https://doi.org/10.1007/s13278-025-01505-z>
- [6] Dawood, K.A., Ghazvini, G.A., Majidi, F. et al. (2025) A hybrid method based on optimized ensemble classifier using genetic algorithm and novel embedded feature extraction based on BERT for detecting fake news in social media. *J Supercomput* 81: 1389. <https://doi.org/10.1007/s11227-025-07841-3>
- [7] E.Almandouh, M., Alrahmawy, M.F., Eisa, M. et al. (2024) Ensemble based high performance deep learning models for fake news detection in Arabic. *Sci Rep* 14: 26591. <https://doi.org/10.1038/s41598-024-76286-0>
- [8] Fan, H., Xue, L., Zhao, B. (2025) A Fake News Detection Method Tailored for Financial Regulatory Agencies. *Comput Econ.* <https://doi.org/10.1007/s10614-025-11072-2>
- [9] Farokhian, M., Rafe, V., Veisi, H. (2024) Fake news detection using dual BERT deep neural networks. *Multimed Tools Appl* 83: 43831–43848. <https://doi.org/10.1007/s11042-023-17115-w>
- [10] Harris, S., Liu, J., Hadi, H.J. et al. (2025) Benchmarking Hook and Bait Urdu news dataset for domain-agnostic and multilingual fake news detection using large language models. *Sci Rep* 15: 15553. <https://doi.org/10.1038/s41598-025-98271-x>
- [11] Khanuja, S. et al. (2021) MuRIL: Multilingual Representations for Indian Languages. arXiv:2103.10730
- [12] Lin, S.Y., Hu, Y.H., Lee, P.J. et al. (2025) Fake News Detection Model with Hybrid Features—News Text, Image, and Social Context. *Inf Syst Front.* <https://doi.org/10.1007/s10796-025-10589-z>
- [13] Marchetti, J., Mastrogiorgio, A. (2025) Becoming fake: an evolutionary model of fake news. *Mind Soc* 24: 929–945. <https://doi.org/10.1007/s11299-025-00342-z>

- [14] Meng, X., Zhao, D., Meng, J. et al. (2025) Domain feature transfer-based multi-domain fake news detection. *Knowl Inf Syst* 67: 7473–7501. <https://doi.org/10.1007/s10115-025-02412-7>
- [15] Mohawesh, R., Maqsood, S., Althebyan, Q. (2023) Multilingual deep learning framework for fake news detection using capsule neural network. *J Intell Inf Syst* 60: 655–671. <https://doi.org/10.1007/s10844-023-00788-y>
- [16] Mohawesh, R., AlQarni, A.A., Alkhushayni, S.M. et al. (2025) A new multilingual framework for fake reviews detection based on a large language model. *J Supercomput* 81: 1134. <https://doi.org/10.1007/s11227-025-07636-6>
- [17] Ni'mah, I., Wijayanti, R., Santosa, A. et al. (2025) A simple contrastive embedding framework for low-resource fake news detection. *Neural Comput & Applic* 37: 21407–21433. <https://doi.org/10.1007/s00521-025-11467-0>
- [18] Patel, S., Surati, S. (2024) Unmasking Fake News: Navigating the Landscape of Fake News Identification, Challenges and Issues. *SN COMPUT. SCI.* 5: 932. <https://doi.org/10.1007/s42979-024-03280-8>
- [19] Puraivan, E., Ormeño-Arriagada, P., Kloss, S., Cofré-Morales, C. (2025) Surface Linguistic Features for Multiclass Fake News Detection in a Multilingual Context. *ICICT 2025*. Springer. [https://doi.org/10.1007/978-981-96-6935-6\\_45](https://doi.org/10.1007/978-981-96-6935-6_45)
- [20] Rama Moorthy, H., Avinash, N.J., Krishnaraj Rao, N.S. et al. (2025) Dual stream graph augmented transformer model integrating BERT and GNNs for context aware fake news detection. *Sci Rep* 15: 25436. <https://doi.org/10.1038/s41598-025-05586-w>
- [21] Sharma, U., Singh, J. (2024) A comprehensive overview of fake news detection on social networks. *Soc. Netw. Anal. Min.* 14: 120. <https://doi.org/10.1007/s13278-024-01280-3>
- [22] Singh, M.K., Ahmed, J., Raghuvanshi, K.K. et al. (2025) A Novel Ensemble Model BharatAuthenticNet for Detecting Fake News: Experimentation and Performance Analysis. *Arab J Sci Eng* 50: 15857–15883. <https://doi.org/10.1007/s13369-025-09975-1>
- [23] Sirra, K., Mogalla, S., Madhuri, K.B. (2024) CSSLnO: Cat Swarm Sea Lion Optimization-based deep learning for fake news detection in Hindi language. *Int J Inf Technol* 16: 4225–4241. <https://doi.org/10.1007/s41870-024-01943-6>
- [24] Sripriya, N., Poornima, S., Janani, M., Jamuna, B. (2026) Fake News Detection Using Multilingual BERT for English and Tamil Language. *SPELLL 2024*. Springer. [https://doi.org/10.1007/978-3-032-05855-3\\_43](https://doi.org/10.1007/978-3-032-05855-3_43)
- [25] Zaheer, H., Bashir, M. (2024) Detecting fake news for COVID-19 using deep learning: a review. *Multimed Tools Appl* 83: 74469–74502. <https://doi.org/10.1007/s11042-024-18564-7>